

FENDERS

Pneumatic Fenders are one of the most widely used Fenders in the Marine & Offshore industries. Franklin Offshore Australia is able to source Pneumatic Fenders in a wide range of shapes and sizes.

Pneumatic Type


Fender Sizes ØDxL	Hook Type (kg)	CTN Type (kg)	Chain (mm)
300 x 500	10	10	10
300 x 600	15	15	10
500 x 800	25	25	13
500 x 1000	35	35	13
800 x 1200	75	175	16
800 x 1500	95	205	16
1000 x 1500	140	310	16
1000 x 2000	170	370	16
1200 x 1800	180	390	19
1200 x 2000	200	420	19
1350 x 2500	270	530	19
1500 x 2500	300	700	22
1500 x 3000	350	790	22
2000 x 3000	550	1430	25
2000 x 3500	650	1570	29
2000 x 6000	950	2170	32
2500 x 4000 P	1100	2610	32
2500 x 5500 P	1350	2970	35
3000 x 5000 P	1700	4320	38
3300 x 4500 P	1800	4160	38
3300 x 6500 P	2250	5370	44
3300 x 10500 P	2800	6850	51

P=Pressure Relief Valve Fitted as Standard


- Mooring chains should be used in conjunction with appropriate swivels and shackles.

Standard tolerances apply.

- Fender Chains can be supplied separately at any size required

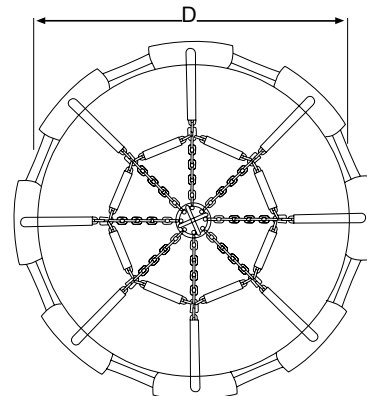

Pneumatic Fenders

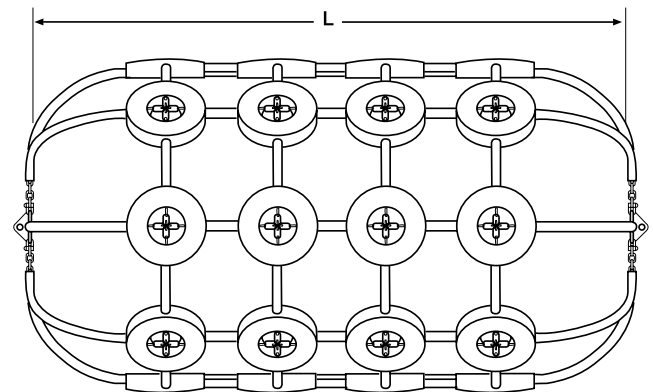

BUOYS

Franklin Offshore Australia Pty Ltd are able to source a large range of buoys for your application. We also carry steel can buoys ready for hire.

Polyform Buoys

Size Dia x Length (cm)	Eye Dia (cm)	Buoyancy Ratings (kg)
23x29	1.6	6
29x37	2.5	13
39x49	2.5	31
47x59	2.5	55
55x71	2.5	85
70x92	3.0	179
86x118	3.8	359
105x138	5.0	610



CALM Buoy



Mooring Buoy Complete with Beacon

