


MATERIALS HANDLING

HEAVY DUTY SNATCH BLOCK

The most common sheave assembly used in the Lifting industry is the Snatch block. With its drop down side, it makes it easy for access to the sheave itself and to install or remove wire rope from the assembly. We carry snatch blocks from 2 Tonne to 30 Tonne in stock. Other sizes can be available upon request.

Dimensions

SWL (t)	Sheave Dia (mm)	Length A1 (mm)	B (mm)	C (mm)	Wire Dia (mm)	Net Weight (kg)
2	75	286	82	70	7-9	4
4	115	345	120	70	10-12	6.1
4	150	399	160	70	16-18	13.8
8	150	475	160	93	20-22	14.4
8	200	528	210	93	20-22	16
10	250	679	260	115	24-26	37.5
12	250	679	260	115	24-26	42
15	300	884	310	133	26-28	65
22	355	952	365	140	28-32	90
30	400	1126	415	155	32-35	135

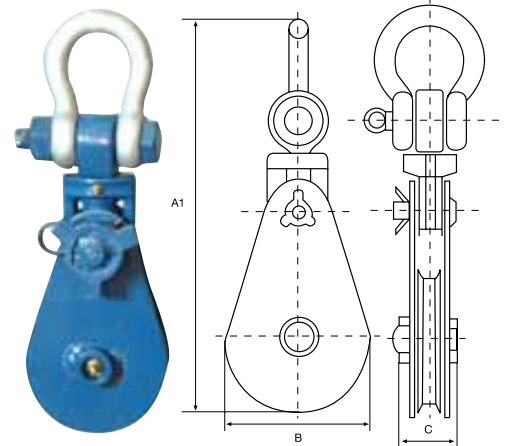

GOLD PIN SHACKLES

Franklin Offshore Australia's Gold Pin shackles are suitable for all lifting and load rated applications.

Key Nots:

- Size range for Screw Pin Bow Shackles is 0.33 Tonne to 25 Tonne
- Size range for Safety Pin Bow Shackles is 2 Tonne – 35 Tonne
- Mill Certificates are available upon request
- Manufactured to AS2741:2002 from Grade 'S' Steel
- Safety factor of 6:1



Franklin Offshore Australia Pty Ltd

el +61 8 9410 6000 • sales@franklinoffshore.com.au